

STARTUP LOGO CHANGE GUIDE

First of all, you need to find out the resolution supported by your CS9100 firmware. Click on **Settings** and choose **System Config**, then open the **About** tab. You can find the resolution in the **OS** field (**fig. 1**)

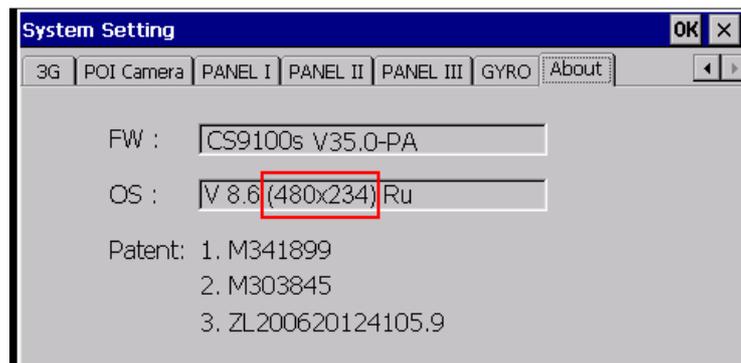


Figure 1

1. Format an SD memory card (32MB - 2 GB) to the FAT16 file system.
2. Store a **logo.bmp** image on the memory card (only in the BMP format).
3. Insert the memory card with the **logo.bmp** file into your powered-off CS9100.
4. Power it up (start the car).
5. A message will appear, stating that the update has started. Another message will appear when the update is finished. (**fig. 2**)



Figure 2

6. Remove the memory card and let the device load completely.
7. Restart the device.

A few important things about the **logo.bmp** file:

- Its resolution must exactly match the **OS** resolution.
- The file must be in the **BMP** format only.
- Color depth must be 24-bit (maximum).
- The horizontal and vertical resolution must be 96 x 96 pixels per inch.



Attention! Switching off CS9100 during the update may damage it.